


16-PORT GFAST 10G DISTRIBUTION POINT MODULE (DPM) DPM-1601



Designed to assist operators in maximizing revenue from **Fiber-to-the-Home** (FTTH) deployments, particularly in scenarios where deploying the final fiber segment is difficult, expensive, or impractical. The **NetComm DPM-1601 16-Port Gfast 10G DPM** acts as a fiber extender for **GPON & XGS-PON** networks, delivering gigabit-class service over the existing copper lead-in cable.

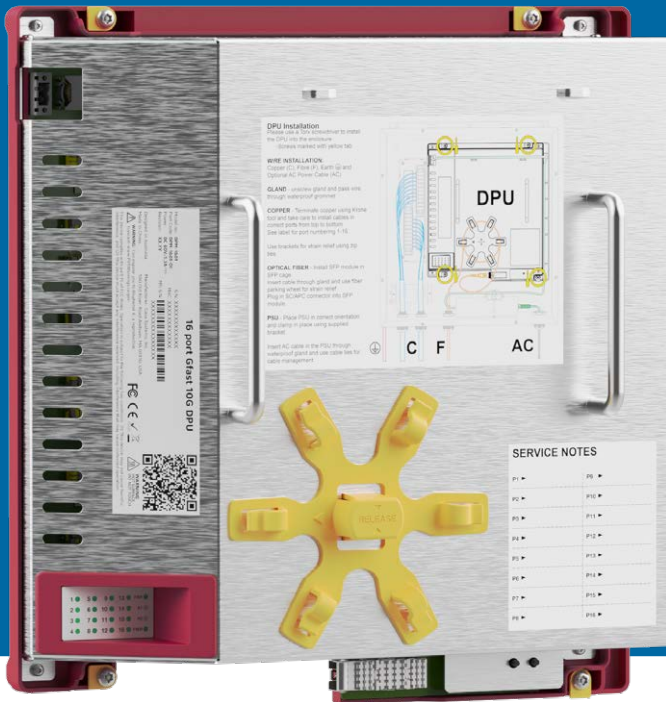

HIGH SPEED BROADBAND

Gfast 212MHz provides aggregate speeds up to 2Gbps, enabling the delivery of fiber-equivalent gigabit services over legacy copper.



REVERSE POWER

The DPUs are reverse powered by the **Network Termination Device** (NTD) installed in the end-user premises, avoiding the cost and delay associated with providing a local AC power connection and eliminating potentially difficult negotiations with apartment owners over access to, and charges for, AC power.



ADVANCED REMOTE MANAGEMENT

The DPUs support **Netconf/YANG**, offering full remote device management and troubleshooting by using a Persistent Management Agent Aggregator (PMAA).



ANYWHERE INSTALLATION

Silent, energy-efficient passive cooling design withstands a wide temperature range from -20°C to $+60^{\circ}\text{C}$. Fully sealed waterproof outdoor housing with surge protection provides enhanced reliability even in the toughest conditions.

TECHNICAL SPECIFICATIONS

CONNECTIVITY

- › 1 x SFP+ uplink port (supports GPON and XGS-PON transceivers)
- › 16 x Gfast (ITU G.993.2/G.9701) ports

SUPPORTED STANDARDS

- › IEEE 802.1Q VLANs
- › IEEE 802.1Q Class of Service ("802.1p")
- › IEEE 802.1ad (Stacked VLANs)
- › IEEE 802.1ag
- › ITU Y.1731 (Fault Management and Performance Monitoring)
- › ITU G.993.2
- › ITU G.9807.1
- › ITU G.988 OMCI
- › ITU G.9700 & G.9701 (G.fast)
- › Broadband Forum TR-156/TR-247/TR-255
- › Broadband Forum TR-301/TR-355
- › (DPU Management)

POWER SUPPLY

- › **Input:** 60V/70W (SR2)
- › Powered by NDD-03XX Gfast NTD or NDD-01XX RPU
- › **Output:** 60V/250mA max

SAFETY STANDARDS

- › IEC/EN 62368-1, Part 1

EMC STANDARDS

- › EN 55032
- › EN 55035

REGULATORY COMPLIANCE

- › CE
- › FCC
- › RoHS
- › WEEE
- › UL

DIMENSIONS & WEIGHT

- › 341mm (L) x 334mm (W) x 141mm (D)
- › 4kg

ENVIRONMENTAL PERFORMANCE

- › **Operating temperature range:** -20°C to +60°C
- › Passively cooled
- › Maintenance free design

INSTALLATION

- › Deploy in the DSE-1608 DPU System Enclosure
- › IP55 weatherproof solution for both indoor and outdoor locations
- › Ports for 2mm to 14mm diameter cables
- › K.45 surge protection (field replaceable)

DEPLOYMENT SCENARIOS:

Indoors, outdoors, on walls, in pits or on poles.

KEY FEATURES

- › Gfast 212a profile
- › Full support for ITU G.9701
- › G.fast specification including Amendments 1, 2 & 3
- › 1 x SFP+ cage supports GPON or XGS-PON field installed transceiver
- › 16 x Gfast (ITU G.993.2/G.9701) ports
- › Passive cooling design with a wide temperature range of -20°C to +60°C
- › Deployed in the DSE-1608 DPU System Enclosure which provides:
- › IP55 protection for indoor and outdoor locations
- › K.45 surge protection (field replaceable)
- › Wall mount bracket
- › Weather-proof cable ports for UTP cables and fibre cable
- › Quick and reliable installation

NetComm DPM-1601 16-port Gfast 10G DPM Spec Sheet Sheet Rev 2

Trademarks and registered trademarks are the property of NetComm Wireless Pty Ltd or their respective owners. Specifications are subject to change without notice. Images shown may vary slightly from the actual product.



DZS

HEADQUARTERS | TEXAS
5700 Tennyson Pkwy
Suite 400 Plano, TX 75024
USA | +1 510 777 7000
www.dzsi.com



Product Source International Datacomm
330 Franklin Turnpike, Mahwah, NJ 07430
201.488.6000 Tel
www.psitec.com / sales@psitec.com